



TURBO HD 8 MP Bullet Camera

User Manual

User Manual

Thank you for purchasing our product. If there are any questions, or requests, do not hesitate to contact the dealer.

This manual may contain several technical incorrect places or printing errors, and the content is subject to change without notice. The updates will be added to the new version of this manual. We will readily improve or update the products or procedures described in the manual.

Regulatory Information

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
 1. This device may not cause harmful interference.
 2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the Low Voltage Directive 2014/35/EU, the EMC Directive 2014/30/EU, the RoHS Directive 2011/65/EU.



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info.



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info.

Industry Canada ICES-003 Compliance

This device meets the CAN ICES-3 (A)/NMB-3(A) standards requirements.

Warning

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Safety Instruction

These instructions are intended to ensure that user can use the product correctly to avoid danger or property loss.

The precaution measure is divided into "Warnings" and "Cautions".

Warnings: Serious injury or death may occur if any of the warnings are neglected.

Cautions: Injury or equipment damage may occur if any of the cautions are neglected.

Warnings Follow these safeguards to prevent serious injury or death.	Cautions Follow these precautions to prevent potential injury or material damage.



Warnings

- In the use of the device, you must be in strict compliance with the electrical safety regulations of the nation and region.
- Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with 12 VDC according to the IEC60950-1 standard. Refer to technical specifications for detailed information.
- Do not connect multiple devices to one power adapter to avoid over-heating or a fire hazard caused by overload.
- Make sure that the plug is firmly connected to the power socket.
- Make sure that the device is firmly fixed if wall mounting or ceiling mounting is adopted.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cord, and then contact the service center.
- Never attempt to disassemble the camera by unprofessional personal.



Cautions

- Do not drop the camera or subject it to physical shock.
- Do not touch sensor modules with fingers.
- Do not place the camera in extremely hot, cold (the operating temperature shall be -40°C to 60°C), dusty or damp locations, and do not expose it to high electromagnetic radiation.
- If cleaning is necessary, use clean cloth with a bit of ethanol and wipe it gently.
- Do not aim the camera at the sun or extra bright places.
- The sensor may be burned out by a laser beam, so when any laser equipment is in using, make sure that the surface of sensor will not be exposed to the laser beam.
- Do not expose the device to high electromagnetic radiation or extremely hot, cold, dusty or damp environment.
- To avoid heat accumulation, good ventilation is required for the operating environment.

- Keep the camera away from liquid while in use for non-water-proof device.

- While in delivery, the camera shall be packed in its original packing, or packing of the same texture.

Mark Description

Table 0-1 Mark Description

Mark	Description
---	DC Voltage

1 Introduction

1.1 Product Features

- The main features are as follows:
- High performance CMOS sensor
 - IR cut filter with auto switch
 - OSD menu with configurable parameters
 - Auto white balance
 - Internal synchronization
 - SMART IR mode
 - 3-axis adjustment

1.2 Overview

This manual applies to two types of bullet cameras. The overviews of each type are shown in the figures below.




Figure 1-1 Overview of Type I Camera

2 Installation

Before you start:

- Make sure that the device in the package is in good condition and all the assembly parts are included.
- Make sure that all the related equipment is power-off during the installation.
- Check the specification of the products for the installation environment.
- Check whether the power supply is matched with your power output to avoid the damage.
- Make sure the wall is strong enough to withstand three times the weight of the camera and the bracket.
- If the wall is cement, insert expansion bolts before installing the camera. If the wall is wooden, use self-tapping screws to secure the camera.
- If the product does not function properly, contact your dealer or the nearest service center. Do NOT disassemble the camera for repair or maintenance by yourself.

2.1 Ceiling/Wall Mounting without Junction Box

Steps:

1. Paste the drill template (supplied) to the place where you want to install the camera.
2. Drill the screw holes and the cable hole (optional) in the ceiling/wall according to the drill template.




Figure 2-1 Drill Template

Note:

Drill the cable hole, when adopting the ceiling outlet to route the cable.

3. Attach the bracket to the ceiling/wall and secure the camera with supplied screws.




Figure 2-2 Fix the Camera to the Ceiling

Note:

- The supplied screw package contains self-tapping screws, and expansion bolts.
- For cement wall/ceiling, expansion bolts are required to fix the camera. For wooden wall/ceiling, self-tapping screws are required.
- 4. Route the cables through the cable hole, or the side opening.

5. Connect the corresponding power cord, and video cable.

6. Power on the camera to check whether the image on the monitor is gotten from the optimum angle. If not, adjust the camera according to the figure below to get an optimum angle.




Figure 2-3 3-axis Adjustment

- 1). Loosen the P screw to adjust the pan position [0° to 360°]. Tighten the screw after completing the adjustment.
- 2). Loosen the T screw to adjust the tilt position [0° to 180°]. Tighten the screw after completing the adjustment.
- 3). Loosen the R screw and rotate the camera [0° to 360°]. Tighten the screw after completing the adjustment.

2.2 Ceiling/Wall Mounting with Junction Box

Before you start:

You need to purchase a junction box separately.

Steps:

1. Paste the drill template on the ceiling/wall.
2. Drill screw holes and the cable hole in the ceiling/wall according to the holes of the drill template.




Figure 2-4 Drill Template of Junction Box

3. Take apart the junction box, and align the screw holes of the bullet camera with those on the Junction box's cover.
4. Fix the camera on the junction box's cover with supplied screws.




Figure 2-5 Fix the Camera on the Junction Box's Cover

5. Attach the junction box body to the ceiling/wall by aligning the screw holes of the junction box.
6. Secure the junction box's body with supplied screws on the ceiling/wall.




Figure 2-6 Fix the Junction Box to the Wall/Ceiling

7. Route the cables through the bottom cable hole, or the side cable hole of the junction box.
8. Combine the junction box cover with its body.




Figure 2-7 Fix the Junction Box Cover back to its Body

9. Repeat the step 5 and 6 of 2.1.1 Ceiling/Wall Mounting without Junction Box to complete the installation.

3 Menu Description

Purpose:

Call the menu by clicking button  on the PTZ Control interface, or call preset No.95.

Steps:

1. Connect the camera with the TVI DVR, and the monitor, shown as the figure 3-1.

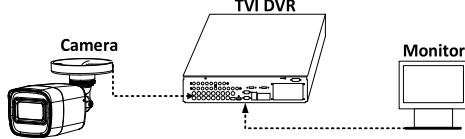


Figure 3-1 Connection

2. Power on the analog camera, TVI DVR, and the monitor to view the image on the monitor.
3. Click PTZ Control to enter the PTZ Control interface.
4. Call the camera menu by clicking  button, or call preset No. 95.

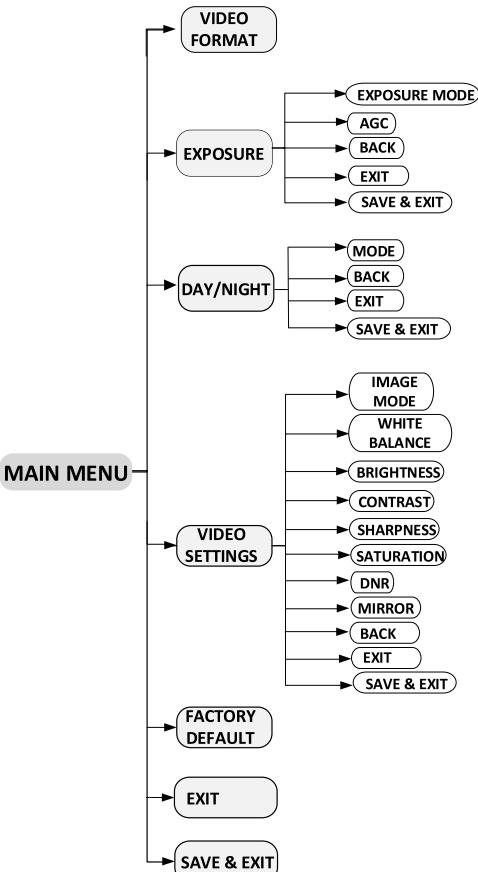


Figure 3-2 Main Menu Overview

5. Click the direction arrow to control the camera.
1). Click up/down direction button to select the item.

- 2). Click Iris + to confirm the selection.
- 3). Click left/right direction button to adjust the value of the selected item.

3.1 VIDEO FORMAT

You can set the video format as 8MP@12.5 fps, 8 MP@15fps, 4MP@25fps, 4MP@30fps, 2MP@25fps, and 2MP@30fps.

3.2 EXPOSURE

Exposure describes the brightness-related parameters, which can be adjusted by **EXPOSURE MODE**, and **AGC**.

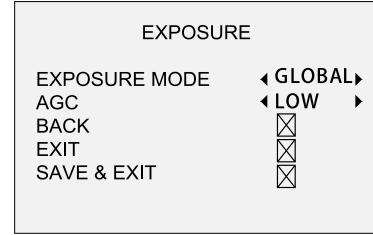


Figure 3-3 EXPOSURE

EXPOSURE MODE

You can set the **EXPOSURE MODE** as **GLOBAL**, **BLC**, and **DWDR**.

● GLOBAL

GLOBAL refers to the normal exposure mode which performs exposure according to the whole image brightness.

● BLC (Backlight Compensation)

BLC (Backlight Compensation) compensates light for the front object to make it clear, but this may cause the over-exposure of the background, where the light is strong.

● DWDR (Digital Wide Dynamic Range)

The **DWDR** helps the camera provide clear images even under backlight circumstances. When both very bright and very dark areas simultaneously exist in the image, **DWDR** balances the brightness level of the whole image to provide clear images with details.

AGC (Automatic Gain Control)

It optimizes the clarity of the image in poor light conditions. The **AGC** level can be set as **HIGH**, **MEDIUM**, or **LOW**.

Note:

The noise will be amplified when setting the **AGC** level. The higher the level is, the more obvious the noise is.

3.3 DAY/NIGHT

COLOR, **BW** (Black White), and **AUTO** are selectable for **DAY/NIGHT** switch.

COLOR

The image is colored in day mode all the time.

B & W (Black and White)

The image is black and white all the time, and the **IR LIGHT** turns on in the poor light conditions. You can turn on/off the **IR LIGHT** and set the value of **SMART IR** in this menu




Figure 3-4 B & W

● IR LIGHT

You can turn on/off the **IR LIGHT** to meet the requirements of different circumstances.

● SMART IR

The **Smart IR** function is used to adjust the light to its most suitable intensity, and prevent the image from over exposure. The **SMART IR** value can be adjusted from 0 to 3. The higher the value is, the more obvious effects are.

AUTO

Automatically switch Color, or BW (Black and White) according to actual scene brightness.

You can turn on/off the **IR LIGHT**, and set the value of **SMART IR** in this menu.

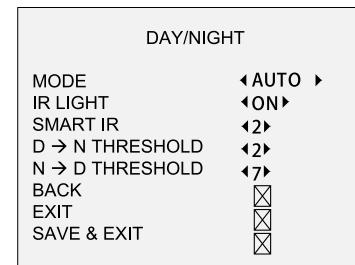


Figure 3-5 AUTO

● IR LIGHT

You can turn on/off the **IR LIGHT** to meet the requirements of different circumstances.

● SMART IR

The **Smart IR** function is used to adjust the light to its most suitable intensity, and prevent the image from over exposure. The **SMART IR** value can be adjusted from 0 to 3. The higher the value is, the more obvious effects are.

● D → N Threshold (Day to Night Threshold)

Day to Night Threshold is used to control the sensitivity of switching the day mode to the night mode. You can set the value from 1 to 9. The larger the value is, the more sensitive the camera is.

● N → D Threshold (Night to Day Threshold)

Night to Day Threshold is used to control the sensitivity of switching the night mode to the day mode. You can

set the value from 1 to 9. The larger the value is, the more sensitive the camera is.

3.4 VIDEO SETTINGS

Move the cursor to **VIDEO SETTINGS** and click **Iris+** to enter the submenu. **IMAGE MODE**, **WHITE BALANCE**, **BRIGHTNESS**, **CONTRAST**, **SHARPNESS**, **SATURATION**, **DNR**, and **MIRROR** are adjustable.




Figure 3-6 VIDEO SETTINGS

IMAGE MODE

IMAGE MODE is used to adjust the image saturation, and you can set it as **STD** (Standard), or **HIGH-SAT** (High Saturation).

WHITE BALANCE

White balance, the white rendition function of the camera, is to adjust the color temperature according to the environment. It can remove unrealistic color casts in the image. You can set the mode as **AUTO**, or **MANUAL**.

● AUTO

Under **AUTO** mode, white balance is being adjusted automatically according to the color temperature of the scene illumination.

● MANUAL

You can set the **R-GAIN/B-GAIN** value from 1 to 255 to adjust the shades of red/blue color of the image.

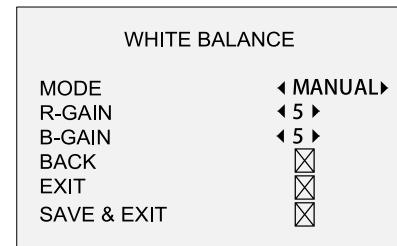


Figure 3-7 MANUAL MODE

BRIGHTNESS

Brightness refers to the brightness of the image. You can set the **BRIGHTNESS** value from 1 to 9 to darken or brighten the image. The higher the value is, the brighter the image is.

CONTRAST

This feature enhances the difference in color and light between parts of an image. You can set the **CONTRAST** value from 1 to 9.

SHARPNESS

Sharpness determines the amount of detail an imaging system can reproduce. You can set the **SHARPNESS** value from 1 to 9.

SATURATION

Adjust this feature to change the saturation of the color. The value ranges from 1 to 9.

DNR (Digital Noise Reduction)

The DNR function can decrease the noise effect, especially when capturing moving images in poor light conditions and delivering more accurate and sharp image. You can set the **DNR** value from 1 to 9.

MIRROR

OFF, H, V, and HV are selectable for mirror.

OFF: The mirror function is disabled.

H: The image flips 180° horizontally.

V: The image flips 180° vertically.

HV: The image flips 180° both horizontally and vertically.

3.5 FACTORY DEFAULT

Move the cursor to **FACTORY DEFAULT** and click **Iris+** to reset all the settings to the factory default.

3.6 EXIT

Move the cursor to **EXIT** and click **Iris+** to exit the menu without saving.

3.7 SAVE & EXIT

Move the cursor to **SAVE & EXIT** and click **Iris+** to save the settings, and exit the menu.



<http://www.annke.com/kb/>
You can also drop us an email at support@annke.com.

DE



BEDIENUNGSANLEITUNG CCTV KAMERA

Warnhinweis:

gliche Änderungen oder Modifikationen, die nicht durch unser Unternehmen bei der Konstruktion des Produkts genehmigt wurden, können den Betrieb durch den Benutzer beeinträchtigen.

WARNHINWEIS:

01/ Installieren Sie die Kamera nicht in einer Umgebung, die nicht im vorgeschriebenen Temperaturbereich liegt.

Installieren und verwenden Sie die Kamera in Umgebungen zwischen -20°C und ~ + 50°C und bei guter Belüftung.

02/ Verwenden Sie die Kamera nicht in Umgebungen mit hohem Druck und stark ätzenden oder anderen speziellen Umgebungen.

Dies kann dazu führen, dass die Kamera nicht richtig arbeitet oder beschädigt werden kann.

03/ Verwenden Sie die Kamera nicht an einem Ort, der voller Staub ist und an dem Gas austritt.

Dies kann dazu führen, dass die Kamera nicht mehr funktioniert.

04/ Versuchen Sie nicht, die Kamera auseinander zu nehmen.

Wenn dies notwendig ist, tun Sie es bitte unter der Anleitung von professionellen Technikern.

05/ Lassen Sie die Kamera nicht fallen und schütteln Sie sie nicht.

Dies kann dazu führen, dass die Kamera nicht mehr funktioniert.

06/ Berühren Sie das vordere Objektiv und den Sensor der Kamera nicht.

Achten Sie darauf, dass Sie keine Fingerabdrücke oder andere Flecken hinterlassen. Wenn die Kamera Blitzen oder anderem intensiven Licht ausgesetzt ist, kann das Bild unscharf werden.

Vor dem Anschluss an die Stromversorgung prüfen Sie bitte, ob diese die Anforderungen der Spezifikation erfüllt oder nicht.

Warnhinweis:

Bitte lesen Sie die Bedienungsanleitung sorgfältig durch, bevor Sie das Gerät verwenden.
Diese Bedienungsanleitung enthält möglicherweise mehrere Parameter-Abweichungen oder Druckfehler. Wenn Sie Fragen haben, wenden Sie sich bitte an den Online-Kundendienst oder den Händler.

WARNHINWEIS:

Es besteht die Gefahr eines elektrischen Schlags

Warnhinweis:
Um das Risiko eines Stromschlags zu reduzieren, sollten nur ein Techniker die vordere oder hintere Abdeckung entfernen.

Warnhinweis:
Zur Vermeidung von elektrischen Schlägen und Brandgefahr wählen Sie bitte das entsprechende Netzteil für die Kamera.

INSTALLATION

Mit DVR als Überwachungs-Mainframe
Erforderliche Ausrüstung: Kamera, Halterung (Dome Kamera unnötig); Netzteil; Kabel; DVR; Festplatte (HDD); Monitor oder Fernseher.

Installationsschritte:


A. Die Installation der Festplatte in den DVR. Einschalten des DVR, dann verbinden Sie das Gerät mit der Kamera zum Debugging der gesamten Überwachungsausrüstung.

B. Installation der Kamera und Bestätigung der Position des DVR.

C. Verkabelung und Anschluss des Steckers der Videokamera und des DVR-Kabels.

Siehe die Abbildungen unten für die genaue Verbindung.

Hinweis: Dieser Vorgang ist nur für den Anschluss gedacht. Bitte bereiten Sie DVR, Netzteil, Videokabel vorab vor.

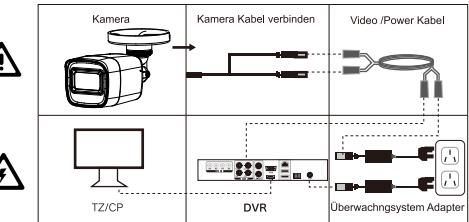

Hinweis: Dieser Vorgang ist nur für den Anschluss gedacht. Bitte bereiten Sie DVR, Netzteil, Videokabel vorab vor.



<http://www.annke.com/kb/>
Sie können uns auch eine E-Mail an support@annke.com senden.



Made in China

Manufacturer: Shenzhen Kean Digital co.,Ltd.
Address: Room 1001, Rujun Building, No.105 Center Road, Bantian Street, Longgang District, Shenzhen, China.
Tech Support Email Address: support@annke.com